




# 2019

## NEW PRODUCTS

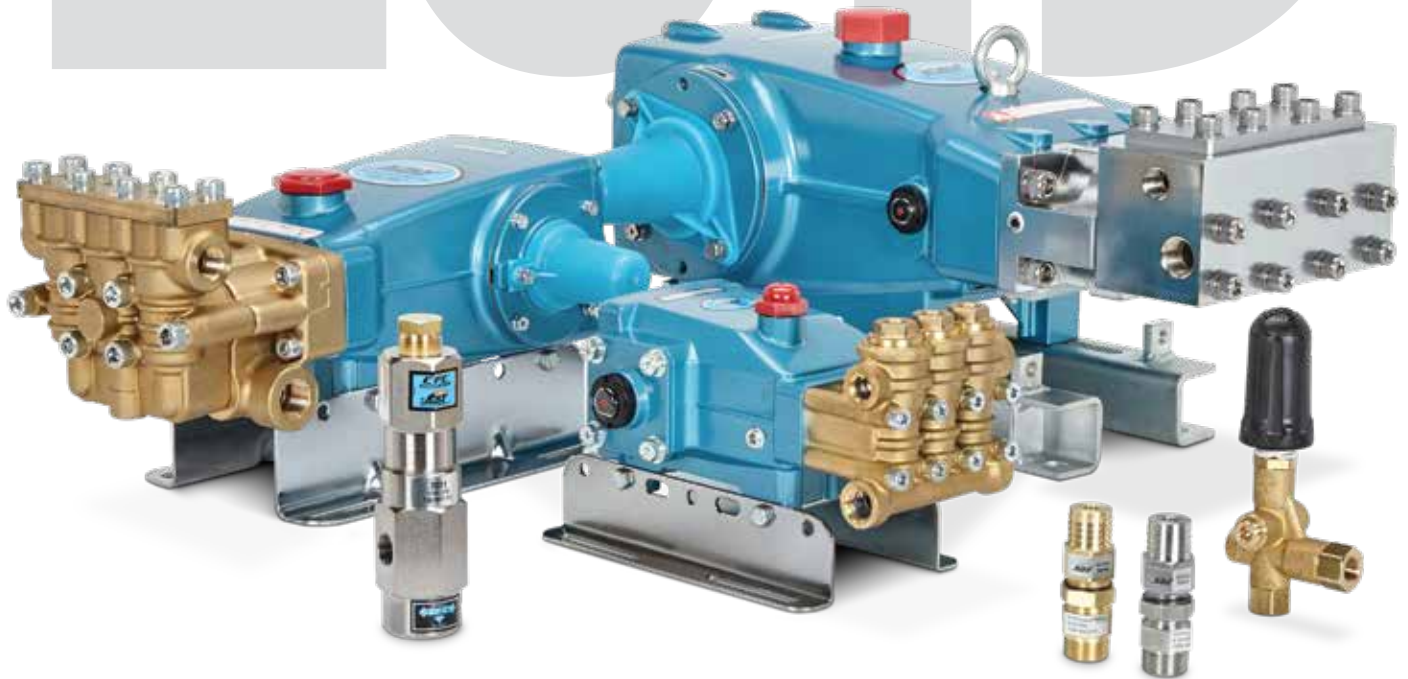

Product Quality, Reliability and Support You Expect

[www.catpumps.com](http://www.catpumps.com)

# New Products from Cat Pumps

Cat Pumps continues to build on its market leading position with the introduction of new products. Every new product is built with the same winning business philosophy: manufacture the longest-lasting most dependable products and back them with availability from stock. Contact us to learn why customers worldwide trust Cat Pumps to keep their equipment running.



## SPECIFICATIONS

## TYPICAL APPLICATIONS

### 5SP30ELU

Max Flow:	3.0 gpm / 11.4 lpm
Max Pressure:	3000 psi / 207 bar

### 5SP35ELU

Max Flow:	3.5 gpm / 13.3 lpm
Max Pressure:	2500 psi / 172 bar

### 5SP40ELU

Max Flow:	4.0 gpm / 15.2 lpm
Max Pressure:	2000 psi / 138 bar

- Pressure washing
- Misting/fogging
- Odor Control

### Common Specifications

Max RPM:	1750
Inlet Port:	1/2" NPT(F)
Accessory Ports (3):	1/4" NPT(F)
Discharge Port:	3/8" NPT(M)
Mounting:	184TC Direct Drive



### 5CP6180CSS

Max Flow:	8.2 gpm / 31 lpm
Max Pressure:	1500 psi / 103 bar
Max RPM:	1750
Inlet Ports (2):	1/2" NPT(F)
Discharge Ports (2):	3/8" NPT(F)

- Car wash prep unit
- Undercarriage wash
- High-pressure wash



### 67102 and 67102C with Seal Flush

Max Flow:	100 gpm / 378.5 lpm
Alt Flow:	80 gpm / 302.8 lpm
Max Pressure:	1000 psi / 69 bar
Alt Pressure:	1200 psi / 83 bar
Max RPM:	680
Alt RPM:	540
Inlet Ports (2):	2 1/2" NPT(F)
Discharge Ports (2):	2" NPT(F)

- Salt and brackish water desalination (SWRO)
- Central cleaning systems
- High-flow washdown



### 7CP6160CS

Max Flow:	10.6 gpm / 40 lpm
Max Pressure:	2500 psi / 172 bar
Max RPM:	1750
Inlet Ports (2):	3/4" NPT(F)
Discharge Ports (2):	1/2" NPT(F)

- Multi-gun wash down
- Hydroexcavating
- Equipment cleaning

## Expanded Performance & Options

### 3CP SERIES STAINLESS STEEL – EXPANDED PERFORMANCE

#### 3CP1211CS

Max Flow:	5 gpm / 19 lpm
Max Pressure:	1700 psi / 117 bar
Max RPM:	1750

#### 3CP1211G (Gearbox to Engine)

Max Flow:	3.8 gpm / 14.4 lpm
Max Pressure:	1500 psi / 103 bar
Max RPM:	1750



### 5CPQ SERIES STAINLESS STEEL – EXPANDED DIRECT DRIVE OPTIONS

#### 5CPQ6261CSS

Max Flow:	5.5 gpm / 21 lpm
Max Pressure:	2000 psi / 138 bar
Max RPM:	1750

#### 5CPQ6271CSS

Max Flow:	6.6 gpm / 25 lpm
Max Pressure:	1800 psi / 124 bar
Max RPM:	1750



### 5CP SERIES BRASS – EXPANDED DIRECT DRIVE OPTIONS

#### 5CP4110CSS

Max Flow:	2.2 gpm / 8.3 lpm
Max Pressure:	4000 psi / 275 bar
Max RPM:	1750

#### 5CP4112CSS

Max Flow:	2.7 gpm / 10.2 lpm
Max Pressure:	4000 psi / 275 bar
Max RPM:	1750

#### 5CP4114CSS

Max Flow:	3.2 gpm / 12.1 lpm
Max Pressure:	4000 psi / 275 bar
Max RPM:	1750

#### 5CP4116CSS

Max Flow:	3.8 gpm / 14.4 lpm
Max Pressure:	4000 psi / 275 bar
Max RPM:	1750



#### 5CP4118CSS

Max Flow:	4.2 gpm / 15.9 lpm
Max Pressure:	4000 psi / 275 bar
Max RPM:	1750

#### 5CP4120CSS

Max Flow:	4.5 gpm / 17.1 lpm
Max Pressure:	4000 psi / 275 bar
Max RPM:	1750

### 25 FRAME – EXPANDED PERFORMANCE

#### 2530, 2531, 2537

Max Flow:	25 gpm / 95 lpm
Max Pressure:	1200 psi / 83 bar
Max RPM:	1025

### 35 FRAME – EXPANDED PERFORMANCE

#### 3520, 3521DHS, 3527

Max Flow:	25 gpm / 95 lpm
Max Pressure:	2000 psi / 138 bar
Max RPM:	870



# Accessories



## SPECIFICATIONS

## TYPICAL APPLICATIONS

### 7SS075 Stainless Steel Inlet Regulator

Flow Range	0 - 12 gpm / 0 - 45 lpm
Inlet Port:	3/4" NPT(F)
Discharge Port:	3/4" NPT(F)

### 7SS100 Stainless Steel Inlet Regulator

Flow Range	0 - 20 gpm / 0 - 76 lpm
Inlet Port:	1" NPT(F)
Discharge Port:	1" NPT(F)

### 7SS150 Stainless Steel Inlet Regulator

Flow Range	0 - 50 gpm / 0 - 189 lpm
Inlet Port:	1 1/2" NPT(F)
Discharge Port:	1 1/2" NPT(F)

### 7SS200 Stainless Steel Inlet Regulator

Flow Range	0 - 75 gpm / 0 - 284 lpm
Inlet Port:	2" NPT(F)
Discharge Port:	2" NPT(F)

- Ideal for positive displacement pump systems
- Easy access for pressure adjustment
- Convenient in-line style mounts either horizontally or vertically

### Common Specifications

Max. Inlet Pressure:	350 psi / 24 bar
Pump Inlet Pres. Range:	15 - 85 psi / 1.03 - 5.86 lpm
NBR (Buna) Max Temp:	176°F / 80°C
FPM (Fluorocarbon) Max Temp:	212°F / 100°C

### 30655 Clutch

Pump Models:	2510-2511, 2530-2537
Pitch Diameter:	12.4" (315 mm)
Belt Type (Dual Groove):	B
Torque Rating:	100 ft/lbs (135Nm)
Power Required:	12 VDC

- In stock, ships within 24 hours
- Works with all 25FR pumps
- Built for the most demanding applications

### 76SAEC.35FR Bell Housing Assembly

Pump Models:	All 35FR
Motor Type:	Hydraulic, SAE "C"
Motor Bolts:	2 or 4 Bolt
Shaft Connection:	Flex Coupler (not included)

- Compact Direct Mounting
- Works with all 35FR pumps
- Lightweight High-Strength Aluminum



Contact Cat Pumps for more information at [info@catpumps.com](mailto:info@catpumps.com) or (763) 780-5440



#### CAT PUMPS

1681 - 94TH LANE N.E. MINNEAPOLIS, MN 55449-4324  
 PHONE (763) 780-5440 — FAX (763) 780-2958  
 e-mail: [info@catpumps.com](mailto:info@catpumps.com)  
[www.catpumps.com](http://www.catpumps.com)