



Oil and Gas Products

Industrial Positive-Displacement, High-Pressure Pumps and Systems



Product Quality, Reliability and Support You Expect

www.catpumps.com



Maximize Uptime with Cat Pumps

Cat Pumps offers a complete line of triplex positive displacement pumps that exceed industry expectations for quality, reliability, availability and support. Our commitment to produce the highest-quality, longest lasting products available is supported by maintaining a rigorous zero defect quality assurance program to guarantee consistently high quality products — every time.

When high-pressure liquid is required, Cat Pumps is the supplier of choice for pumps, systems and control accessories. Applications include dehydration, injection, cleaning, accumulator charging, hydrostatic testing, and numerous other industry uses.

Engineering and Technical Support

Cat Pumps offers engineering and technical support for product selection, installation, maintenance, pump repair, trouble shooting and custom designed systems. Live Support available M-F, 8:00 a.m. to 5:00 p.m CST, 763-780-5440 and at techsupport@catpumps.com

Readily Available – Off the Shelf

In addition to receiving the highest quality products available, Cat Pumps customers also benefit with the following:

- Pumps and repair parts are stock items and have a 99.7% order fill rate
- Fast shipping with 95% of orders shipping within 24 hours
- Worldwide sales and service channel stocking genuine Cat Pumps products



Global Presence / Worldwide Acceptance

The dependability of Cat Pumps products is a major reason why our products are in use on oil rigs in the North Sea, reverse osmosis systems in Singapore, hydroexcavation trucks from Alberta to Texas, and in a remarkable variety of other high-pressure applications from New York to New Zealand.


With operations in the United States, United Kingdom, Belgium, Germany and distribution network covering the globe, Cat Pumps products are everywhere you need them to be.

Technical support is also offered by our worldwide network of qualified distributors.

Quality That Keeps Your Equipment Running

Cat Pumps designs and builds products to the highest quality levels. Every last design detail is optimized for product life and performance. Examples include the following features:


- Specially formulated seals and high density, polished ceramic plungers typify the attention to design detail that results in thousands of hours of trouble-free service.
- Stainless steel valves, seats and springs provide corrosion resistance, positive seating and long life.
- Wet seal design increases service life by allowing pumped fluids to cool and lubricate the elastomers on both sides. (This is a Cat Pumps original design)

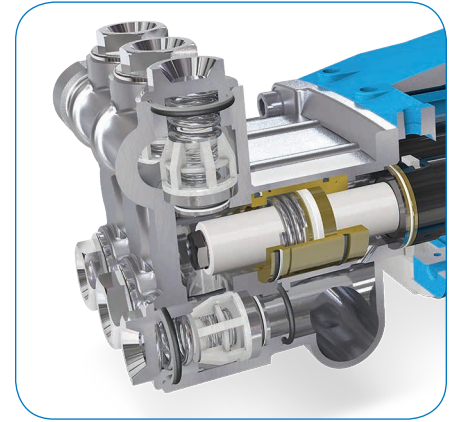


Product Performance Range

A wide range of pump options are available, including a variety of products that meet industry certifications and directives.

- Flow: 0.13 to 240 gpm (0.49 to 908 lpm)
- Pressure: 100 to 10,000 psi (6.9 to 689 bar)
- RPM: 100 to 3450
- Liquid Temperature: -10° to 240°F (-23° to 115°C)
- Manifold Materials: Brass, Nickel Aluminum Bronze, 304 and 316 Stainless Steel, Duplex Stainless Steel. Other materials available on request.
- Sealing Material: NBR, FPM, EPDM, PTFE, High Temp (240° F) and other materials available upon request.
- Drives: Electric, Engine, Hydraulic, Pneumatic

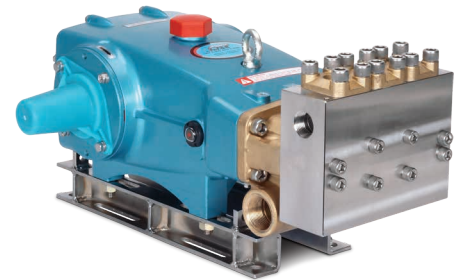

Model 3560
20 gpm (75.7 lpm) at 4,000 psi (275 bar)

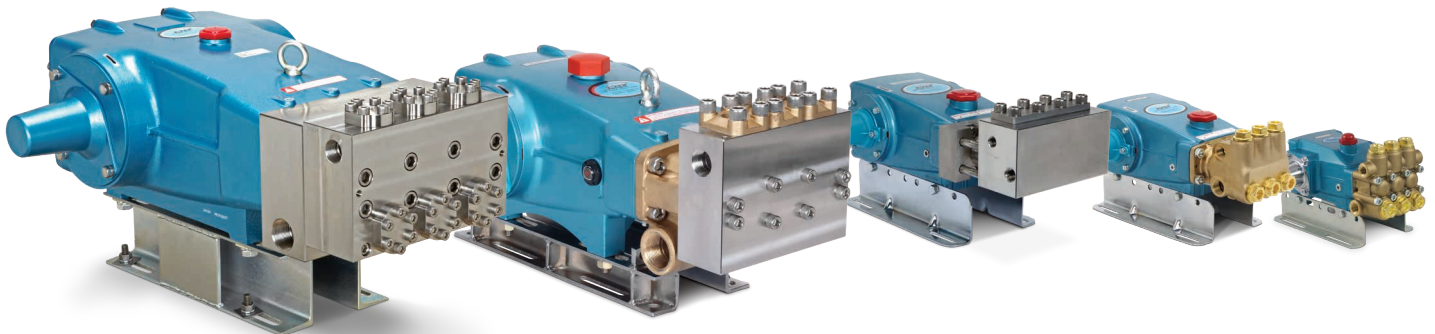

Applications

Mobile

Cat Pumps products are widely used on all types and sizes of mobile equipment, from small washdown units to hydroexcavation trucks and large mining equipment.

- Hydroexcavation
- Jetting
- Steam Trucks
- High-Pressure Wash Down
- Hydrostatic Testing
- Well Drilling Foam Injection
- Tank Cleaning
- Water Blasting



Injection and Enhanced Oil Recovery

To keep product flowing and maximize uptime, Cat Pumps products are used in a variety of injection applications, from waste water injection to liquid CO₂ Injection.

- CO₂ Injection
- Steam Injection
- Chemical Injection
- Salt/Waste/Produced Water Injection
- Foam Injection
- Seal Gland Flushing
- Methanol Injection
- Polymer Injection
- Fresh Water Injection



Safety/Maintenance/Cleaning

Proven reliability is another reason why Cat Pumps products are specified for safety, maintenance and cleaning applications.

- Platform Desalination (SWRO)
- Blow-off Preventer (BOP) Accumulator Charging
- Hydrostatic Testing
- TEG Dehydration
- Odor and Dust Control Misting
- Base Oil Transfer
- High Pressure Mist Cooling
- Rig Cleaning
- Barnacle Removal
- Drilling Mud Filter Cleaning
- Wet Sandblasting
- Central Cleaning Systems
- Heavy Equipment Wash
- Tank Cleaning
- Shaker Cleaning



Flexible Drive Options

Motor Driven

Cat Pumps offers hollow shaft and solid shaft pumps for easy configuration and assembly.

- **Hollow Shaft Direct Drive Pumps – 5/8", 3/4" and 1-1/8"**
 - 0.13 to 5 gpm/0.49 to 18.9 lpm
 - 100 to 3,500 psi/6.9 to 241 bar
- **Solid Shaft Bell Housing Direct Drive**
 - 1 to 10.5 gpm/3.7 to 39.7 lpm
 - 100 to 5,000 psi/6.9 to 345 bar
- **Solid Shaft Belt Driven or Direct Driven with Gearmotor**
 - 0.1 to 240 gpm/0.37 to 908 bar
 - 100 – 10,000 psi/6.9 to 689 bar



Engine Driven

Pumps available in hollow shaft and solid shaft make them easy to use with engine driven systems.


- **Hollow Shaft Direct Drive Pumps – 3/4" and 1"**
 - 2.5 to 5 gpm/9.4 to 18.9 lpm
 - 100 to 4,000 psi/6.9 to 275 bar
- **Hollow Shaft Gearbox Direct Drive – 1" and 1-1/8"**
 - 3.5 to 10.5 gpm/13.2 to 39.7 lpm
 - 100 to 5,000 psi/6.9 to 345 bar
- **Solid Shaft Belt Driven**
 - 1 to 240 gpm/3.7 to 908 bar
 - 100 to 10,000 psi/6.9 to 689 bar



Hydraulic and Pneumatic Driven

Hydraulics and pneumatic driven pumps are commonly used for mobile and remote applications.

- **Solid Shaft Direct Drive**
 - 1 to 75 gpm/3.7 to 286 lpm
 - 100 to 10,000 psi/6.9 to 689 bar

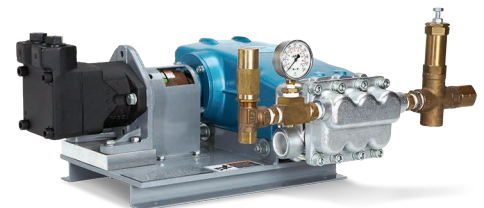


Specialty Pumps

ATEX Certified

Cat Pumps offers a full range of pumps that meet the ATEX directive for pumps used in an explosive atmosphere. The ATEX directive addresses many European Union directives describing equipment and work environment permitted in an environment with an explosive atmosphere.


Under the ATEX Directive, equipment is designated by group, category, and zone. Cat Pumps has been certified as ATEX 2, which also covers all the ATEX 3 requirements.

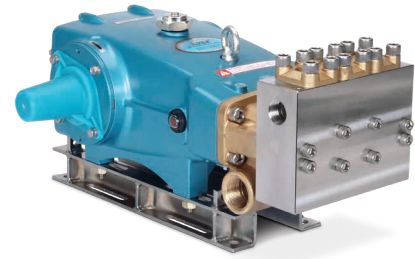

Model 3560 .ATEX2

TEG


The formation of hydrates (water crystals) in gas pipelines has a significant negative impact on production, causing unplanned shutdowns and damaged system equipment and instrumentation. Triethylene glycol (TEG) is the most common method of removing water from natural gas lines. Cat Pumps electric/engine-driven TEG pump product line has been field-proven in the most rigorous dehydration conditions.



Model 1050.44101

Flushed Pumps


A flush-style pump is designed to allow a flushing liquid to circulate between the high pressure and low pressure seals. The seal flush can greatly increase seal life and reduce pump maintenance in applications where low lubricity liquids such as deionized (DI) water or liquid CO₂ are used. Cat Pumps offers a variety of flow and pressure ranges of flush-style pumps from 0.25 – 240.0 gpm/0.95 to 908 lpm and up to 10,000 psi/689 bar.

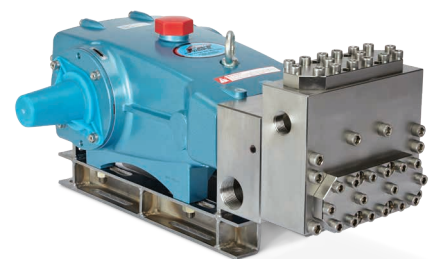

Model 3831K

Liquid CO₂ Pumps

Cat Pumps liquid CO₂ series of pumps feature modifications to accommodate the unique properties of liquid CO₂. The seals are modified to handle low lubricity and low temperature that liquid CO₂ applications require. Pump manifolds are modified for inlet pressures to 800 psi (55 bar) and discharge pressures up to 5,000 psi (345 bar). Drive-end and manifold combinations are available to cover a wide flow range of flow from 0.68 to 30 gpm (2.6 to 113.5 lpm).



Model 1530RSCM.CO2

Custom Pumping Systems

For over 25 years, Cat Pumps has been the industry leader in providing custom-engineered pumping systems to meet a wider range of application needs. By selecting Cat Pumps for your next pumping system, customers eliminate the hassle and expense of designing, multiple source buying, fabrication and testing. The technical sales team assists with proper component selection, as well as installation, operation and maintenance support.

All systems are designed, built and pressure tested in the Cat Pumps Minneapolis location. To begin the quoting process, call the main office at (763) 780-5440 or submit the custom system quote form at catpumps.com.

With thousands of installations running around the world, Cat Pumps is the supplier of choice for custom pumping systems.



System Configuration

With extensive experience building thousands of systems, Cat Pumps can help determine the best configuration for any application.

Base

System design starts with choosing the base that best fits the application. Numerous base configurations are available to meet space, portability, sound and material demands.

- Standard • Vertically Stacked • Enclosed • Multiple Pump

Power Source

A qualified technical staff with extensive experience can assist in recommending the correct product for any power source available.

- Electric • Gas • Diesel • Hydraulic • Pneumatic

Drive Package

A wide variety of drive packages are available to complement any power source of choice.

- Belt • Direct Drive • Gearbox • Clutch

Accessories

Choose from hundreds of high-quality genuine Cat Pumps accessories for optimum system performance and life.

- Regulator • Relief / Pop-off Valve • Pressure Gauge
- Pulsation Dampener • Inlet Filter / Strainer • Oil

Advanced Control Options



Ask about advanced control options designed to provide maximum system performance as well as system protection.

Options include:

- Variable Frequency Drives (VFD)
- PID Loop (varies speed of pump to maintain system pressure)
- Multiple Pump Systems
- Low-Pressure Seal Monitors
- Auto Shutdowns (Temperature and Low Inlet Pressure)

Other control options are available upon request.

ABOUT CAT PUMPS

Proven Quality, Customer Focused

Cat Pumps is the world leader in the design, manufacture and marketing of the most dependable high-pressure positive displacement reciprocating triplex pumps and systems in the market. Our mission to exceed customer expectations for quality, reliability, availability, delivery, technical expertise and aftermarket support to assure the best value in all the industries served.

LOCATIONS

Worldwide Headquarters

Cat Pumps

1681 94th Lane Northeast
Minneapolis, MN 55449
USA

P: 763-780-5440
F: 763-780-2958
techsupport@catpumps.com
www.catpumps.com

Territories Served
U.S., Canada

International Division

P: 763-780-5440
F: 763-785-4329
intlsales@catpumps.com
www.catpumps.com

Territories Served
Africa, Asia, Australia, Central and
South America, Mexico, Middle East,
New Zealand, Turkey

Cat Pumps International N.V.

Heiveldekens 6A
2550 Kontich
Belgium

P: 32 3 450 71 50
F: 32 3 450 71 51
cpi@catpumps.be
www.catpumps.be

Territories Served
Western Europe (except U.K.,
Germany, and Austria)

Cat Pump (U.K.) Ltd.

1 Fleet Business Park, Sandy Lane
Church Crookham
FLEET, Hampshire GU52 8BF
England

P: +44 1252 622031
F: +44 1252 626655
sales@catpumps.co.uk
technical@catpumps.co.uk
www.catpumps.co.uk

Territories Served
England, Ireland, Scotland,
N. Ireland, Wales

Cat Pumps Deutschland GmbH

Buchwiesse 2, D-65510
Idstein
Germany

P: +49 6126 9303 0
F: +49 6126 9303 33
catpumps@t-online.de
www.catpumps.de

Territories Served
Austria, Commonwealth of Independent States
(CIS), Germany and Eastern Europe

SALES, DISTRIBUTION, SERVICE

Call today for product and application assistance.
763-780-5440 or visit us at www.catpumps.com



CAT PUMPS

1681 - 94TH LANE N.E. MINNEAPOLIS, MN 55449-4324
PHONE (763) 780-5440 — FAX (763) 780-2958
e-mail: techsupport@catpumps.com
www.catpumps.com

For International inquiries go to www.catpumps.com and navigate to the "Contact Us" link.